



# "Actima" Clamping Device





View from below




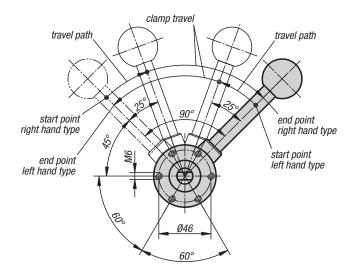








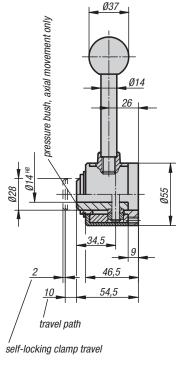

with transverse axis in bore







#### Material:

Steel:

housing thermoplastic; ball knob Duroplast PF 31; accessories steel.

### Type:

Black oxide finish; housing black; ball knob red; accessories black oxide finish.

#### **Part Number Example:**


K0020.10

#### Note

The travel path is 10 mm. Self-locking occurs in any position within only 2 mm of clamp travel. Thus workpieces with tolerances of up to 1.5 mm can be safely clamped. The "Actima" Clamping Device can be fitted in any horizontal or vertical position.

Standard parts allow further applications. They are available as optional accessories. All parts of the cam system subject to heavy loads are case-hardened (pressure sleeve and accessories only if specified).

The maximum permissible clamping force is approximately 4905 N.





# "Actima" Clamping Device



## KIPP "Actima" Clamping Device with transverse axis in the hole, metric


Item No.	Version					
K0020.10	right-hand / push					
K0020.15	right-hand / pull					
K0020.20	left-hand / push					
K0020.25	left-hand / pull					


## KIPP "Actima" Clamping Device with through hole, metric


Item No.	Version
K0020.30	right-hand / push
K0020.35	right-hand / pull
K0020.40	left-hand / push
K0020.45	left-hand / pull

## KIPP "Actima" Accessories, metric

Item No.	Item code
K0020.02	DISK FOR ACTIMA
K0020.03	TAPER FOR ACTIMA
K0020.04	VEE-BLOCK FOR ACTIMA







taper prism




# **Stop latch**








external threads




internal threads








Profile adapter plate





## Material:

Housing die-cast zinc, powder-coated. Pin steel 1.0718. Washer plastic. Circlip spring steel. Countersunk screw steel quality class 8.8.

### Type:

Housing black or red. Pin blue chromate. Circlip, countersunk screw, black.


### Part Number Example:

K0271.140061

### Note:

Engagement every 90°. Please order profile adapter plate separately. Can be used with external and internal

threads.



## KIPP Stop latch, metric

Item No.	Color	Version	A	D1
K0271.140061	black	internal thread	40	M6
K0271.140062	red	internal thread	40	M6
K0271.140061X10	black	external thread	40	M6
K0271.140062X10	red	external thread	40	M6

### KIPP Profile adapter plate, metric

Item No.	В	Н	L	SW
K0271.09302505	25	5	30	9

## Notes: